

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
 Project \_\_\_\_\_ Position \_\_\_\_\_



## Function oven

**Model:** GEU423

**Cod:** NP01041021002

### Technical data


<b>Number of pans:</b>	4
<b>Pans size (mm):</b>	GN 2/3
<b>Tray centre distance (mm):</b>	75
<b>Number of fans:</b>	2
<b>Fan speed:</b>	1
<b>Dimensions (mm):</b>	658 x 752 x 561
<b>Net weight (kg):</b>	48
<b>Volume (m3):</b>	0,300
<b>Chamber size (mm):</b>	451 x 435 x 358
<b>Electric power (kW):</b>	3,5
<b>Voltage (V):</b>	220-240
<b>Power supply (A):</b>	16
<b>Phases:</b>	1N
<b>Cable section (mmq):</b>	3G2,5
<b>Frequency (Hz):</b>	50-60
<b>Cold water connection:</b>	3/4"
<b>Cold water pressure (bar):</b>	Max 5 bar
<b>Drain size (mm):</b>	30
<b>Packing dimensions (mm):</b>	680 x 790 x 731
<b>Chamber size (mm):</b>	451 x 435 x 358
<b>Gross weight (kg):</b>	50,5
<b>Gross volume (m3):</b>	0,400

### Features

<b>Oven type:</b>	Convection
<b>Control:</b>	Electro-mechanic ovens
<b>Functions:</b>	Convection cooking, cooking with humidity
<b>Steam:</b>	Direct
<b>Steam management:</b>	Pressure
<b>Temperature range:</b>	50°C - 300°C
<b>Door:</b>	Hinged door
<b>Cooking chamber bottom:</b>	AISI 430 mirror finish
<b>Range timer:</b>	1' - 120'
<b>Flue:</b>	Always open

Electro-mechanical electric convection ovens with humidifier. Capacity 4 trays Gn 2/3. Cooking chamber with rounded corners, welded without visible welding. Adjustable height of the feet. Removable grid shelves with distance between trays of 75 mm Door with wide glass surface equipped with air channel for the external glass ventilation, which further limits the temperature on the external surface. Door handle in plastic material, highly resistant to shocks and temperatures. Silicone gasket inserted in the front of the chamber, with maximum seal capacity, avoiding temperature drops. Heating through high efficiency coated heating elements. Timer from 1' to 120' (plus infinite position). Manual button humidifier. Temperature control in the cooking chamber from 50 °C to 300 °C. 2 fans. Wide air flow channels of the chamber that allows a perfect cooking uniformity, both in conditions of scarce and full load. Folding opening of the internal glass. Control panel of all the functional parts placed on the right side of the oven. Safety thermostat in the cooking chamber to avoid dangerous high temperatures. Water inlet for the humidifier control. Internal lighting positioned on the left side of the cooking chamber. Electric power 3,5 Kwatt - 220-240V/1 50/60 Hz

## Technical draw

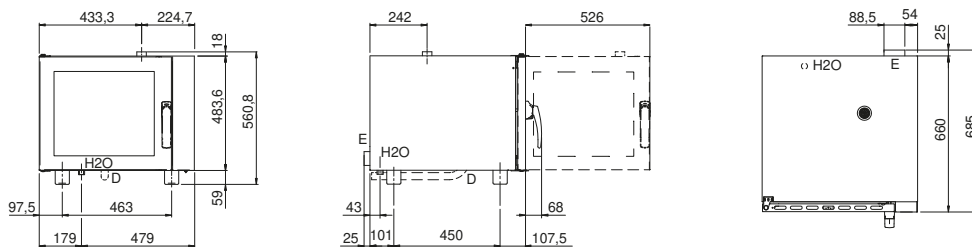

**E:** Electric connection

**D:** Drain for water

**H2O:** Water inlet 3/4"